

**AQUATIC EFFECTS TECHNOLOGY
EVALUATION (AETE) PROGRAM**

**Toxicity Assessment of
Highly Mineralized Waters
from Potential Mine Sites**

AETE Project 1.2.4

Aquatic Effects Technology Evaluation Program

TOXICITY ASSESSMENT
OF HIGHLY MINERALIZED WATERS
FROM POTENTIAL MINE SITES

Prepared by:

B.A.R. Environmental Inc.
Nicholas Beaver Park, R.R. #3
Guelph, Ontario
N1H 6H9
Tel: (519) 763-4410
Fax: (519) 763-4419

JULY 1997



AQUATIC EFFECTS TECHNOLOGY EVALUATION PROGRAM

Notice to Readers

Toxicity Assessment of Highly Mineralized Waters from Potential Mine Sites

The Aquatic Effects Technology Evaluation (AETE) program was established to review appropriate technologies for assessing the impacts of mine effluents on the aquatic environment. AETE is a cooperative program between the Canadian mining industry, several federal government departments and a number of provincial governments; it is coordinated by the Canada Centre for Mineral and Energy Technology (CANMET). The program was designed to be of direct benefit to the industry, and to government. Through technical and field evaluations, it identified cost-effective technologies to meet environmental monitoring requirements. The program included three main areas: acute and sublethal toxicity testing, biological monitoring in receiving waters, and water and sediment monitoring.

The technical evaluations were conducted to document certain tools selected by AETE members, and to provide the rationale for doing a field evaluation of the tools or provide specific guidance on field application of a method. In some cases, the technical evaluations included a go/no go recommendation that AETE takes into consideration before a field evaluation of a given method is conducted.

The technical evaluations were published although they do not necessarily reflect the views of the participants in the AETE Program. The technical evaluations should be considered as working documents rather than comprehensive literature reviews. The purpose of the technical evaluations focused on specific monitoring tools. AETE committee members would like to stress that no one single tool can provide all the information required for a full understanding of environmental effects in the aquatic environment.

For more information on the monitoring techniques, the results from their field application and the final recommendations from the program, please consult the AETE Synthesis Report to be published in the spring of 1999.

Any comments concerning the content of this report should be directed to:

Geneviève Béchard
Manager, Metals and the Environment Program
Mining and Mineral Sciences Laboratories - CANMET
Room 330, 555 Booth Street, Ottawa, Ontario, K1A 0G1
Tel.: (613) 992-2489 Fax: (613) 992-5172
E-mail: gbechard@nrcan.gc.ca



PROGRAMME D'ÉVALUATION DES TECHNIQUES DE MESURE D'IMPACTS EN MILIEU AQUATIQUE

Avis aux lecteurs

Évaluation de la toxicité des eaux fortement minéralisées d'éventuels emplacements miniers

Le Programme d'évaluation des techniques de mesure d'impacts en milieu aquatique (ÉTIMA) visait à évaluer les différentes méthodes de surveillance des effets des effluents miniers sur les écosystèmes aquatiques. Il est le fruit d'une collaboration entre l'industrie minière du Canada, plusieurs ministères fédéraux et un certain nombre de ministères provinciaux. Sa coordination relève du Centre canadien de la technologie des minéraux et de l'énergie (CANMET). Le programme était conçu pour bénéficier directement aux entreprises minières ainsi qu'aux gouvernements. Par des évaluations techniques et des études de terrain, il a permis d'évaluer et de déterminer, dans une perspective coût-efficacité, les techniques qui permettent de respecter les exigences en matière de surveillance de l'environnement. Le programme comportait les trois grands volets suivants : évaluation de la toxicité aiguë et sublétales, surveillance des effets biologiques des effluents miniers en eaux réceptrices, et surveillance de la qualité de l'eau et des sédiments.

Les évaluations techniques ont été menées dans le but de documenter certains outils de surveillance sélectionnés par les membres d'ÉTIMA et de fournir une justification pour l'évaluation sur le terrain de ces outils ou de fournir des lignes directrices quant à leur application sur le terrain. Dans certains cas, les évaluations techniques pourraient inclure des recommandations relatives à la pertinence d'effectuer une évaluation de terrain que les membres d'ÉTIMA prennent en considération.

Les évaluations techniques sont publiées bien qu'elles ne reflètent pas nécessairement toujours l'opinion des membres d'ÉTIMA. Les évaluations techniques devraient être considérées comme des documents de travail plutôt que des revues de littérature complètes.

Les évaluations techniques visent à documenter des outils particuliers de surveillance. Toutefois, les membres d'ÉTIMA tiennent à souligner que tout outil devrait être utilisé conjointement avec d'autres pour permettre d'obtenir l'information requise pour la compréhension intégrale des impacts environnementaux en milieu aquatique.

Pour des renseignements sur l'ensemble des outils de surveillance, les résultats de leur application sur le terrain et les recommandations finales du programme, veuillez consulter le Rapport de synthèse ÉTIMA qui sera publié au printemps 1999.

Les personnes intéressées à faire des commentaires concernant le contenu de ce rapport sont invitées à communiquer avec M^{me} Geneviève Béchard à l'adresse suivante :

Geneviève Béchard
Gestionnaire, Programme des métaux et de l'environnement
Laboratoires des mines et des sciences minérales - CANMET
Pièce 330, 555, rue Booth, Ottawa (Ontario), K1A 0G1
Tél. : (613) 992-2489 / Fax : (613) 992-5172
Courriel : gbechard@nrcan.gc.ca

EXECUTIVE SUMMARY

Mines exist in geologically anomalous areas where elevated metals are a common feature of the surrounding area. Surficial mineralized zones cause elevated metal concentrations in the terrestrial and aquatic environments and the natural biota, via acclimatization, tend to reflect these highly mineralized environments. The study is to provide realistic information on the environmental effects of mining activities and the application of laboratory sublethal toxicity tests to highly mineralized waters (HMWs).

This study tested the following hypothesis: natural waters in mineralized areas which have been mined, or are likely to be mined, have no potential for chronic toxicity. The study involved submitting samples with a battery of tests, including growth inhibition with *Selenastrum capricornutum* and *Lemna minor*, reproduction and survival of *Ceriodaphnia dubia*, growth and survival of the fathead minnow, and viability of the rainbow trout embryo. If a HMW is toxic, *Ceriodaphnia* and fathead minnow are acclimated to the sample and retested.

Criteria for selecting a HMW sample were developed following discussions with specialists in geochemistry and CANMET representatives. The criteria propose that if concentrations of metals and of sulphates in a receiving water surpass the limits listed in the British Columbia working/approved criteria for aquatic life, the receiving water would be considered as a HMW.

Only a single site, Discovery Pond, from Voisey's Bay, Labrador (Voisey's Bay Nickel Co. Ltd.) was tested and the sample was toxic to all of the test organisms. Acclimation of *Ceriodaphnia dubia* and fathead minnows was also not successful. Due to the toxicity of the sample, no tests could be performed with acclimated animals.

Representatives of the mining industry recommended additional sites for future HMW samples. These included B.C. sites on the Windy Craggy Deposit, Red Mountain, Bruceside Project /Sulphurets Property and Mount McIntosh/Pemberton Hills.

A method of identifying the input of HMWs in a stream or river is needed (such as conductivity) which can be simply used in the field. The water quality of HMWs can vary substantially. A large number of samples should be tested to identify the scale of problem, the degree of variation and the typical background conditions for different types of mines.

SOMMAIRE

Les mines se trouvent dans des régions d'anomalies géologiques dont la caractéristique commune est la richesse en métaux. Les zones minéralisées de surface sont à l'origine d'une forte concentration de métaux dans les milieux terrestres et aquatiques. Les organismes vivants, par l'acclimatation, témoignent aussi de l'existence de ces environnements fortement minéralisés. L'étude vise à fournir des renseignements réalistes sur les effets de l'activité minière sur l'environnement et sur l'application des essais de mesure de la toxicité sublétales en laboratoire aux eaux fortement minéralisées.

L'hypothèse à vérifier était la suivante : les eaux naturelles de régions minéralisées ayant été (ou susceptibles d'être) exploitées pour leurs mines ne posent aucun risque de toxicité chronique. On a donc soumis des échantillons à une batterie d'essais, qui mesuraient notamment : l'inhibition de la croissance de *Selenastrum capricornutum* et de *Lemna minor* ; la reproduction et la survie de *Ceriodaphnia dubia* ; la croissance et la survie du tête-de-boule ; la viabilité des embryons de la truite-arc-en-ciel. Si une eau fortement minéralisée est toxique, on y acclimate *Ceriodaphnia* et le tête-de-boule, puis on les soumet de nouveau aux essais.

On a élaboré les critères de sélection d'un échantillon d'eau fortement minéralisée après discussions avec des géochimistes et des représentants de CANMET. Si les eaux réceptrices renferment plus que les limites de métaux et de sulfates exposées dans les critères officiels ou officiels de la Colombie-Britannique concernant la vie aquatique, on les considérerait comme fortement minéralisées.

On a soumis aux essais toxicologiques l'échantillon d'un seul lieu, l'étang Discovery, dans la région de la baie Voisey, Labrador (Voisey's Bay Nickel Co. Ltd.), et cet échantillon s'est révélé toxique pour tous les organismes. *Ceriodaphnia dubia* et le tête-de-boule n'ont pas réussi à s'y acclimater. En raison de sa toxicité, nous n'avons pas pu effectuer d'essais avec des animaux acclimatés.

Les représentants de l'industrie minière ont recommandé des emplacements supplémentaires en Colombie-Britannique pour le prélèvement des futurs échantillons d'eau fortement minéralisée, notamment : le dépôt Windy Craggy, Red Mountain, le projet Bruce side sur la propriété Sulphurets ainsi que le secteur du mont McIntosh/collines Pemberton.

On a besoin d'une méthode qui permettra de déterminer l'apport d'eau fortement minéralisée dans un ruisseau ou une rivière (p. ex. conductimétrie), que l'on peut utiliser en toute simplicité sur le terrain. La qualité de l'eau fortement minéralisée peut varier considérablement. On devrait soumettre un nombre important d'échantillons à des essais pour cerner l'échelle du problème, sa variabilité et le contexte associé aux différents types de mines.

TABLE OF CONTENTS

1.0	INTRODUCTION	1
1.1	BACKGROUND	1
1.2	OBJECTIVE	2
1.3	PROJECT DESCRIPTION	2
1.3.1	Recruitment and Selection of Study Sites	2
1.3.2	Toxicity tests	4
2.0	METHODS	5
2.1	SAMPLE COLLECTION AND HANDLING	5
2.1.1	Samples For Chemical Analysis	5
2.1.2	Samples for Toxicity Testing	5
2.2	CHEMICAL ANALYSES	7
2.3	CULTURE OF THE ORGANISMS	8
2.3.1	<i>Selenastrum capricornutum</i>	8
2.3.2	<i>Lemna minor</i>	8
2.3.3	<i>Ceriodaphnia dubia</i>	8
2.3.4	Fathead minnows	8
2.3.5	Rainbow trout embryos	9
2.4	ACCLIMATION PROCEDURES	9
2.4.1	Acclimation of fathead minnows	9
2.4.2	Acclimation of <i>Ceriodaphnia dubia</i>	10
2.5	TOXICITY TESTS	10
3.0	RESULTS	12
3.1	CHEMICAL ANALYSIS OF DISCOVERY POND HMW	12
3.2	SINGLE CONCENTRATION TESTS WITH DISCOVERY POND HMW	13
3.3	ACCLIMATION OF CERIODAPHNIA AND FATHEAD MINNOWS	13
4.0	DISCUSSION	14
4.1	TOXICITY OF DISCOVERY POND OUTFLOW	14
4.2	SELECTION OF OTHER HMW SITES	14
4.3	CONSIDERATIONS IN SELECTING HMWs	22
5.0	REFERENCES	25

LIST OF TABLES

Table 2-1	Chemical parameters measured in the sample of Discovery Pond Outflow	6
Table 2-2	Physical-chemical data measured in the Discovery Pond Outflow sample prior to toxicity testing.	7
Table 3-1	Toxicity of the Discovery Pond Outflow to toxicity test organisms	12
Table 3-2	Responses of <i>Ceriodaphnia</i> and fathead minnows during acclimation to Discovery Pond Outflow.	13
Table 4.2-1	Surface water quality of Little Camp Creek Inflow, Bruceside Project, Sulphurets Property	15
Table 4.2-2	Surface water quality of Little Camp Creek Outflow, Bruceside Project, Sulphurets Property	17
Table 4.2-3	Surface water quality of stations in the Windy Craggy deposit area.	19
Table 4.2-4	Water chemistry of possible HMW sites in the Mount McIntosh/Pemberton Hills area, Northern Vancouver Island	21
Table 4.2-5	Location of sites recommended for future HMW samples.	21

LIST OF APPENDICES

APPENDIX 1:	Summary Tables of Test Conditions
APPENDIX 2:	Criteria for the Selection of Highly Mineralized Waters
APPENDIX 3:	Instructions For Collecting and Shipping Highly Mineralized Water Samples
APPENDIX 4:	Test Reports

1.0 INTRODUCTION

1.1 BACKGROUND

The Aquatic Effects Technology Evaluation (AETE) program was established to review appropriate technologies for assessing the impacts of mine effluents on the aquatic environment. AETE is a cooperative program between the Canadian mining industry, several federal government departments and a number of provincial governments. It is coordinated by the Canada Centre for Mineral and Energy Technology (CANMET). The program is designed to be of direct benefit to industry and government. An important focus of this program is to evaluate and identify cost-effective technologies to meet environmental monitoring requirements. The program includes three main areas: acute and sublethal toxicity testing, biological monitoring in receiving waters, and water and sediment testing.

Mines exist in geologically anomalous areas where elevated metals are a common feature of the surrounding area. Surficial mineralized zones cause elevated metal concentrations in sediment and vegetation and these occurrences are useful exploration tools. Consequently, mining camps are surrounded by naturally elevated metal concentrations in the terrestrial and aquatic environments. Therefore, natural biota, via acclimatization, tends to reflect their highly mineralized environments.

The responses of sublethal toxicity tests where background waters are highly mineralized, such as is typical of the location of metal mines, is to be determined. This work is required to test the following hypothesis regarding HMW: "Natural waters in mineralized areas which have been mined, or are likely to be mined, have no potential for chronic toxicity."

This work is needed to provide background data against which to assess toxicity testing for operating mines, for which pre-mining conditions could neither be determined or simulated, and to assess the utility of the proposed tools, relative to determining any impacts of mining which differ from pre-mining impacts or which cause real environmental problems compared to pre-mining conditions. This information will also provide a database which can be called upon when companies are operating, or

considering operating, in areas of similar mineralized water characteristics. The importance of the work is that it will provide realistic information as to the environmental effects of mining activities and the application of specific, laboratory sublethal toxicity tests to mineralized waters.

1.2 OBJECTIVE

The principal objective of the study is to determine if highly mineralized waters (HMWs) have a potential for chronic toxicity. To meet this objective it is necessary to answer these questions:

1. Is there a potential for highly mineralized waters (HMWs) to be toxic to selected laboratory test species? Toxicity will be defined as a significant difference in test organism performance in the HMW assay, as compared to responses observed in controls with laboratory dilution water performed at the same time.
2. If HMWs are toxic, can the test organisms be acclimated to these waters? Successful acclimation occurs when the performance of the acclimated organisms satisfies the criteria in the appropriate test protocol within a defined time period.

The project is organized in two parts: (1) a screening study, testing samples with a comprehensive battery of tests, and (2) an acclimation study, where two of the organisms would be acclimated to toxic HMW samples for a finite period of time, and then retested.

1.3 PROJECT DESCRIPTION

1.3.1 Recruitment and Selection of Study Sites

At the initiation of the project, a precise definition of what constituted a highly mineralized water and an understanding of its chemical characteristics in the context of a mining environment was not available. Thus, an initial difficulty was providing a practical definition of a HMW so that samples could be collected and tested.

The first approach was to determine “typical” background conditions for different types of mines and define HMWs by comparing the metal levels with those contained in Water Quality Criteria (e.g., B.C., 1995 or CCME, 1996). A request for information on highly mineralized waters (HMWs) was prepared and sent to all participating CANMET mines. This letter requested background conditions from all participating CANMET mines which have collected chemical data (hardness, alkalinity, pH, metal concentrations, DOC, etc.) on their local receiving waters. The letter also enquired whether HMW should be defined by reference to Water Quality Criteria.

We received telephone responses to our request for information on HMWs, though little data was provided. The definition of a HMW was still confusing and at times contradictory, depending on different people. A conference call was then organized by CANMET, with specialists in geochemistry, CANMET representatives, and the laboratory.

Following this teleconference, the following definition of HMW was agreed upon:

“Highly mineralized waters (HMW) are the result of water coming into contact with naturally mineralized zones. These waters contain elevated levels of metals and of major ions, especially sulphate”.

Additional discussions with CANMET included the proviso that a HMW is a natural receiving water which can also support aquatic organisms such as fish and invertebrates, and is therefore not naturally toxic to the local aquatic life.

Criteria for selecting a HMW sample were developed from this definition. It originally appeared that British Columbia would be the source of most of the HMW samples for this project. Therefore, British Columbia Ministry of Environment, Lands and Parks guidelines for metals and sulphate were used to set the criteria for a HMW. A guide for the selection and sampling of HMWs was prepared for use by the mining community (Appendix 2). The guide proposes that if concentrations of metals and of sulphates are greater than certain limits, the receiving water will be considered as a HMW.

The metal and sulphate thresholds are based on the limits listed in the B.C. working/approved criteria for aquatic life.

Two sites undergoing development or exploration offered to take part in the study: Voisey's Bay, Labrador (Voisey's Bay Nickel Co. Ltd.) and Red Mountain, B.C. (Royal Oak Mines). Sampling kits were shipped to both sites in the summer and autumn of 1996 and a sample was obtained from the Voisey's Bay site. The Red Mountain site could not be sampled because the evaluation team was occupied in closing down the camp for the season.

1.3.2 Toxicity tests

The HMW sample was characterized with the following assays: growth inhibition with *Selenastrum* and *Lemna minor*, reproduction and survival of *Ceriodaphnia*, growth and survival of the fathead minnow, and viability of the rainbow trout embryo. The assays were chosen based on recommendations of the sublethal toxicity screening study and CANMET's Aquatic Toxicity subgroup. The test with *Selenastrum* was performed by Les Laboratoires Eco-CNFS in Pointe Claire (Québec). Assays involving *L. minor*, *Ceriodaphnia*, fathead minnows, and rainbow trout embryos were performed in B.A.R. Environmental's laboratory in Guelph, Ontario.

2.0 METHODS

2.1 SAMPLE COLLECTION AND HANDLING

2.1.1 Samples for Chemical Analysis

Four litres of the HMW were collected in a plastic container which was rinsed three times with the sample before filling. Five sub-samples were taken for measurements of total metals, dissolved metals, cyanide, ammonia and routine parameters (pH, alkalinity, etc.). Approximately 250 mL of the sample was filtered (0.45 µm filter) into a plastic bottle and preserved with the addition of 5 mL of concentrated acid (50% HNO₃). This portion was reserved for measurement of dissolved metals. A second volume of approximately 250 mL was placed into a plastic bottle and preserved with 5 mL of concentrated acid (50% HNO₃), for the measurement of total metals. A 500 mL sample, destined for the analysis of cyanide, was placed in a plastic bottle and preserved with 2 mL of 6N NaOH. A second 500 mL sample, for the analysis of ammonia, was placed in a plastic bottle and preserved with 5 mL concentrated H₂SO₄ (50%). Finally a 1 L sample was placed in a plastic bottle (without preservatives) for the analysis of routine parameters. The bottles were sealed and labelled, placed in cooler with frozen ice-packs and sent by express courier to Seprotech Laboratories in Ottawa, Ontario. A list of the parameters and the results of analyses are shown in Table 2-1.

2.1.2 Samples for Toxicity Testing

The Discovery Pond outflow sample was collected by the staff of the consulting company (Jacques Whitford Environment Limited) which was employed in evaluation of the site. B.A.R. Environmental supplied the sampling kits which were 20 L plastic pails fitted with a polyethylene plastic liner. The outflow was sampled by instantaneous grab. The pails were filled to maximum capacity and the plastic liner was closed with a twist-tie, after expelling as much air as possible. B.A.R. Environmental supplied the Chain-of-Custody forms.

Table 2-1. Chemical parameters measured in the sample of Discovery Pond Outflow HMW by Seprotech Laboratories (Ottawa, Ontario).

Parameter	Unit	Detection limit	Discovery Pond Outflow
TDS ^a	mg·L ⁻¹	1	6
TSS ^b	mg·L ⁻¹	1	44
total CN	mg·L ⁻¹	0.005	<0.005
free CN	mg·L ⁻¹	0.002	<0.002
N-NH ₃	mg·L ⁻¹	0.01	<0.01
conductivity	µS·cm ⁻¹	1.0	79
alkalinity ^c	mg·L ⁻¹	1.0	2
hardness ^c	mg·L ⁻¹	1.0	21
pH	pH unit		5.90
As-dissolved	mg·L ⁻¹	0.10	<0.1
Cd-dissolved	mg·L ⁻¹	0.02	<0.01
Cu-dissolved	mg·L ⁻¹	0.01	0.43
Pb-dissolved	mg·L ⁻¹	0.10	<0.1
Ni-dissolved	mg·L ⁻¹	0.02	1.11
Zn-dissolved	mg·L ⁻¹	0.01	0.02
As (total)	mg·L ⁻¹	0.10	<0.1
Cd (total)	mg·L ⁻¹	0.02	<0.02
Cu (total)	mg·L ⁻¹	0.01	0.43
Pb (total)	mg·L ⁻¹	0.10	<0.1
Ni (total)	mg·L ⁻¹	0.02	1.12
Zn (total)	mg·L ⁻¹	0.01	0.02

^a Total Dissolved Solids.

^b Total Suspended Solids.

^c as CaCO₃.

Upon arrival at the laboratory, the sample was logged in and recorded according to B.A.R. Environmental standard operating procedures. A sub-sample for the *Selenastrum* test was collected in a 200 mL polyethylene plastic bottle which was subsequently shipped, in a cooler with ice packs, to the laboratory in Pointe Claire, Québec.

The sample was stored at 4 (\pm 2) °C until testing, when its temperature was brought to the appropriate test temperature before the assay was initiated. Physical-chemical parameters measured immediately prior to testing included dissolved oxygen, temperature, conductivity and pH (Table 2-2).

Table 2-2. Physical-chemical data measured in the Discovery Pond Outflow sample prior to toxicity testing.

Date Collected (d/m/y)	Date Received (d/m/y)	Dissolved O ₂ (mg·L ⁻¹)	Conductivity (μ S·cm ⁻¹)	pH
05/11/96	07/11/96	10.8	79	5.5

2.2 CHEMICAL ANALYSES

Concentrations of dissolved and total metals in the HMW sample were determined by Inductively Coupled Plasma Emission Spectroscopy (ICP). Cyanide (total and free) and ammonia were determined by automated colorimetry. Total and suspended solids were determined by the gravimetric technique. Alkalinity and pH were determined by titration, conductivity by electrode, and hardness by calculation from concentrations of Ca and Mg. Detection limits for each parameter are listed in Table 2-1.

2.3 CULTURE OF THE ORGANISMS

2.3.1 *Selenastrum capricornutum*

A strain of this alga was obtained from the Québec Ministère de l'Environnement et de la Faune, and was then maintained in Algal Assay Procedure (AAP) culture media by Les Laboratoires Eco-CNFS, Pointe Claire, Québec. New cultures are started weekly and growth is regularly monitored. Maintenance of this organism in the laboratory follows recommendations in Environment Canada (1992a).

2.3.2 *Lemna minor*

Duckweed (strain C4) cultures were obtained from the University of Toronto and thereafter maintained by weekly subculture in Hoagland's E+ medium. The growth media was prepared by adding reagent grade salts to deionized (reverse-osmosis) water. Maintenance of this organism in the laboratory follows recommendations in the draft test method of the Saskatchewan Research Council (1996).

2.3.3 *Ceriodaphnia dubia*

These organisms are cultured from an original stock obtained from the Ontario Ministry of the Environment, Rexdale, Ontario, in 1988. They are maintained at 25°C with a 16 h light/ 8 h dark photoperiod in laboratory well water. New cultures are started weekly and are fed a combination of cultured alga (*Selenastrum capricornutum*) and a yeast broth mixture. Maintenance of this organism in the laboratory follows recommendations by Environment Canada (1992b).

2.3.4 Fathead minnows

An original brood stock of fathead minnows was obtained from the Aquatic Biology Unit, Ontario Ministry of the Environment, Rexdale, Ontario, with additional wild stock from Bobcaygeon, Ontario. These were used to set-up in-house laboratory cultures, which provide organisms for tests. Minnows were cultured in laboratory well water, with a photoperiod of 16 h light/ 8 h dark. Fish were fed

several times a day with a brine shrimp diet. Maintenance of this organism in the laboratory follows recommendations in Environment Canada (1992c).

2.3.5 Rainbow trout embryos

Eggs and milt for trout embryo assays were obtained from a provincial government fish hatchery (Ontario Ministry of Agriculture and Food, Alma Research Station, Alma, Ontario). Eggs were obtained from 1 to 3 females and milt from at least one male. Eggs and milt were transported to the laboratory on ice. During transport and storage, milt was kept at a depth less than 6 mm at 0 to 4°C, and eggs were kept no more than 3 layers thick at 0 to 3°C. The eggs were fertilized and used in toxicity testing within 24 hours of collection. Maintenance of this organism in the laboratory follows recommendations in Environment Canada (1996).

2.4 ACCLIMATION PROCEDURES

Ceriodaphnia dubia and fathead minnows were allowed to acclimate to the HMW sample. The step-by-step acclimation procedure employed in this study was developed by Keith Holtze of B.A.R. Environmental. The procedure consists of two steps, with each step lasting approximately one week: (1) acclimation to the pH and hardness conditions of the receiving water, using adjusted laboratory water, and (2) gradual acclimation to the full strength receiving water. The organisms are gradually introduced to the full strength solution within a reasonable amount of time, which allows tolerance to develop without selection of a resistant strain or race.

2.4.1 Acclimation of fathead minnows

An "adjusted" laboratory dilution water, at pH 7.0, but with the same hardness level as the HMW was prepared. The pH of the modified dilution water was not adjusted below neutrality, since reproduction of adult fathead minnows in our laboratory ceases at pH < 7.0. Adult fathead minnows (16 to 24 pairs) were transferred and held in this water for five days, with a water renewal rate similar to cultures in regular laboratory culture water. Acclimation of the organisms to the receiving water started with newly fertilized eggs from these fish. The newly fertilized eggs were collected and

gradually acclimated to the full strength receiving water from the egg stage to hatch, over a period of six days. The proportion of receiving water to adjusted dilution water was increased at each renewal period, on a daily basis. The larvae which are newly hatched (<24 hr old) in the 100% receiving water are used in toxicity testing.

2.4.2 Acclimation of *Ceriodaphnia dubia*

Neonate ceriodaphnids were transferred to "adjusted" laboratory dilution water, with hardness and pH levels similar to that of the receiving water. Acclimation of the organisms to the receiving water started with third brood neonates from this culture. The neonates were collected and placed in 10% receiving water. The amount of receiving water was increased each day until the animals were acclimated to full strength receiving water after 6 days. The proportion of receiving water to adjusted dilution water was increased every day, at each renewal period. The *Ceriodaphnia* continued to have broods of young while being cultured in the full strength HMW sample. Toxicity tests are performed with the third brood of neonates from these cultures.

2.5 TOXICITY TESTS

Toxicity tests were conducted as either static or static replacement tests (trout embryo, fathead minnow, *Ceriodaphnia*). The assay involved exposures to 100% v/v HMW and to control dilution water, with five replicates per exposure. In tests with the trout embryo, fathead minnow and *Ceriodaphnia*, control exposures consisted of laboratory dilution water. The control in the *Lemna minor* consisted of the "test media" (SRC, 1996). Since the *Selenastrum* test is performed on microplates, a second control microplate was prepared with the usual control "reagent water" specified in the test method. The test conditions of the five toxicity tests are summarized in Tables A-1.1 to A-1.5 in Appendix 1.

Determination of endpoints for tests with *Selenastrum*, *Ceriodaphnia* and fathead minnow followed recommendations contained in the standard test methods (Environment Canada 1992a, 1992b, 1992c). Endpoints for the rainbow trout E-test were determined according to a draft Environment

Canada test method (Environment Canada, 1996). The responses of the organisms in the laboratory water and receiving water control exposures were compared using a t-test. If the data were not normally distributed, they were transformed (arcsine, log, power function) and retested. The statistics were performed with software provided by Environment Canada (TOXSTAT program; Gulley *et al.* 1989).

3.0 RESULTS

3.1 CHEMICAL ANALYSIS OF DISCOVERY POND HMW

The sample of the Discovery Pond outflow contained elevated concentrations of copper and nickel, and a measurable quantity of zinc (430, 1120, and 20 $\mu\text{g}\cdot\text{L}^{-1}$, respectively). Alkalinity and hardness values were 2 $\text{mg}\cdot\text{L}^{-1}$ and 21 $\text{mg}\cdot\text{L}^{-1}$ as CaCO_3 , respectively, which suggests that levels of the major cations, Ca^{2+} and Mg^{2+} , were not elevated. The sample was slightly acidic, with a pH of 5.9. The conductivity of the sample was 79 $\mu\text{S}\cdot\text{cm}^{-1}$, suggesting that the sulphate concentration was less than 100 $\text{mg}\cdot\text{L}^{-1}$. For comparison, a 100 $\text{mg}\cdot\text{L}^{-1}$ solution of magnesium sulphate has a calculated conductivity of about 230 $\mu\text{S}\cdot\text{cm}^{-1}$.

Table 3-1. Toxicity of the Discovery Pond Outflow to toxicity test organisms, showing endpoint measurements and significant difference with responses in laboratory control.

Assay (endpoint measurement)	Mean response		Significant difference (p<0.05)
	Discovery Pond	Laboratory Dilution Water (Control)	
<i>Selenastrum capricornutum</i> growth (cell numbers)	27992	969418	yes
<i>Lemna minor</i> growth (numbers of fronds; \pm SD)	6.9 (1.2)	36.8 (6.3)	yes
<i>Ceriodaphnia dubia</i> survival (%)	0	100	yes
<i>Ceriodaphnia dubia</i> reproduction (no. young/female; \pm SD)	0	30 (3.1)	yes
Fathead minnow survival (%)	0	96	yes
Fathead minnow growth (weight in mg; \pm SD)	- ^a	0.632 (0.023)	yes
Rainbow trout embryo viability (%)	0	95	yes

^a complete mortality

3.2 SINGLE CONCENTRATION TESTS WITH DISCOVERY POND HMW

Results of toxicity tests with the Discovery Pond outflow are shown in Table 3-1. The sample caused considerable toxicity to all of the test organisms. All of the animals involved in the testing died, though the alga and duckweed did grow during the exposures. No rainbow trout eggs were viable after 7 days of exposure to the HMW. All larval fathead minnows died within 96 hours into the test, so the growth of the exposed minnows could not be measured. *Ceriodaphnia* ceased reproduction during the exposures, and all of these animals also died. There was a significant reduction (81% inhibition) in duckweed growth in the full strength exposure (97% v/v sample). Algal growth was almost completely inhibited (97% inhibition).

3.3 ACCLIMATION OF CERIODAPHNIA AND FATHEAD MINNOWS

Acclimation of *Ceriodaphnia dubia* and fathead minnows was not successful (Table 3-2). Within days of the transfer to the 100% HMW sample, all of the organisms succumbed. The fathead acclimation procedure was repeated twice with identical results. In three culture health tests with the young ceriodaphnids exposed to the 100% v/v HMW, no young were produced prior to the animals' deaths. Due to the toxicity of the sample, no tests could be performed with acclimated animals.

Table 3-2. Responses of *Ceriodaphnia* and fathead minnows during acclimation to Discovery Pond outflow.

<i>Ceriodaphnia dubia</i>		fathead minnow
% Survival	Number of young per female	% viable eggs
0	0	0

4.0 DISCUSSION

4.1 TOXICITY OF DISCOVERY POND OUTFLOW

The Discovery Pond outflow was extremely toxic to all of the test organisms, and neither *Ceriodaphnia* nor fathead minnows could be acclimated to the sample. During a previous study, the pond was sampled in the winter and these samples were toxic to rainbow trout and to *Daphnia magna* (Jacques Whitford Environment Ltd., 1996). While the elevation of the pond appears to be a barrier to fish, they have been observed in the pond during the summer (Bruce Bennett, JWEL, personal communication). The toxicity of the sample is most likely due to the elevated concentrations of copper and nickel present (Table 2-1) at the low hardness conditions of the sample (since the toxicity of metals increase with decreasing water hardness). For comparison, the CCME (1996) guidelines for the protection of aquatic life list values of 25 $\mu\text{g L}^{-1}$ for Ni, and 2 $\mu\text{g L}^{-1}$ for Cu, in low hardness waters such as Discovery Pond.

4.2 SELECTION OF OTHER HMW SITES

Once an acceptable definition of HMWs was determined, Madame Danielle Rodrigue of CANMET contacted representatives of the mining industry who had expressed an interest in the toxicity of HMWs. Madame Rodrigue communicated the names of the interested parties to B.A.R. Environmental and these people were contacted. The people contacted included Mr. Marlin Murphy of Homestake, Mr. Harold Bent of Royal Oak Mines, Mr. Bruce Downing and Mr. Derek Riehm of Teck Corporation, Mr. Bill Napier and Mr. Bruce Bennett of Voisey's Bay, Mr. Ian Sharpe of B.C. Environment, Mr. Fred Hewitt of Newhawk Gold Mines, Mr. Calvin Price of Placer Dome, and Mr. Glen Watson of INCO. One proposed site was not considered since the water was not from a natural source, but rather was drainage from a closed mine. A second site was eliminated since the input of contaminants appeared to be linked to acidic precipitation and was not due to a highly mineralized water.

Table 4.2-1 Surface water quality (in mg·L⁻¹) of Little Camp Creek Inflow, Bruceside Project, Sulphurets Property, British Columbia (data provided by Mr. Bruce McLeod).

Parameters	Sampling Date		
	9/13/94	7/14/94	8/16/93
pH - on site	5.857		
pH	6.65	7.02	6.7
Conductivity	778	225	244
Total Dissolved Solids	499	156	174
Total Suspended Solids	<1	<1	20
Hardness	322	111	115
Alkalinity	41.5	30.4	33
Chloride	<0.5	0.6	<0.5
Sulphate	264	72.9	78.1
Total Metals			
Arsenic	0.0005	0.0002	0.0027
Cadmium	0.0081	0.0015	0.0016
Calcium	120	42.2	42.8
Copper	0.026	0.003	0.012
Iron	0.212	0.217	2.23
Lead	0.005	0.001	0.006
Magnesium	5.66	1.58	2.04
Molybdenum	0.001	0.002	0.002
Silver	0.0003	<0.0001	<0.0001
Zinc	1.35	0.172	0.12
Mercury	<0.00001	<0.00001	0.00001
Dissolved Metals			
Arsenic	0.0002	0.0002	0.0009
Cadmium	0.0079	0.0004	0.0015
Calcium	120	41.9	42.8
Copper	0.018	0.003	0.008
Iron	0.115	0.180	0.475
Lead	<0.001	<0.001	<0.001
Magnesium	5.51	1.58	2.04
Molybdenum	<0.001	0.002	0.001
Silver	0.0001	<0.0001	<0.0001
Zinc	1.34	0.169	0.097

Mr. Calvin Price, of Placer Dome, was contacted regarding the Sulphurets site. Mr. Price discussed the site with the company's geological exploration team, who indicated that several HMWs may exist on the site. There appear to be several naturally acidic (pH 2 to pH 3) drainages containing elevated concentrations of copper and sulphates. The site is difficult to access and unfortunately, no further exploration activity is planned (Mr. C. Price, personal communication).

Mr. Bruce McLeod provided water sampling summary results from the Newhawk Gold Mines Sulphurets property (Table 4.2-1 and 4.2-2). The Newhawk Gold Mines Ltd. Sulphurets Project will be on a Care and Maintenance basis during 1997 and no environmental personnel will be available on site. Mr. Bruce McLeod states that Newhawk Gold Mines would be interested in participating in an HMW study if all costs and personnel are covered by CANMET (Mr. B. McLeod, personal communication).

The Little Creek Inflow and Outflow were sampled in August 1993, July 1994 and September 1994. The Little Creek Outflow was also sampled in July 1994. The samples contain elevated concentrations of several metals, in particular Cd, Cu, Fe and Zn, but the levels of these metals varied from sample to sample. In the Outflow, Cd ranged from <0.0002 to $0.0019 \text{ mg}\cdot\text{L}^{-1}$, Cu from 0.003 to $0.034 \text{ mg}\cdot\text{L}^{-1}$, Fe from 0.078 to $6.54 \text{ mg}\cdot\text{L}^{-1}$ and Zn from 0.060 to $0.183 \text{ mg}\cdot\text{L}^{-1}$ (Table 4.2-1). In the Inflow, Cd fluctuated from 0.0015 to $0.0081 \text{ mg}\cdot\text{L}^{-1}$, Cu from 0.003 to $0.026 \text{ mg}\cdot\text{L}^{-1}$, Fe from 0.212 to $2.23 \text{ mg}\cdot\text{L}^{-1}$ and Zn from 0.12 to $1.35 \text{ mg}\cdot\text{L}^{-1}$ (Table 4.2-2). The pH of these waters, as measured in the laboratory, ranged from pH 4.20 to pH 7.02 (Tables 4.2-1 and 4.2-2).

A single sample contained sulphate at levels greater than $100 \text{ mg}\cdot\text{L}^{-1}$ (the September Inflow sample with $264 \text{ mg}\cdot\text{L}^{-1}$; Table 4.2-1). This particular sample would qualify as a HMW since levels of metals are also elevated (Cu: $0.026 \text{ mg}\cdot\text{L}^{-1}$; Zn: $1.35 \text{ mg}\cdot\text{L}^{-1}$). The pH as measured in the laboratory was near-neutral, pH 6.65. However, it is not known if the creek is habitat for aquatic life.

Table 4.2-2 Surface water quality (in mg·L⁻¹) of Little Camp Creek Outflow, Bruceside Project, Sulphurets Property, British Columbia (data provided by Mr. Bruce McLeod).

Parameters	Sampling Date			
	9/13/94	7/14/94	9/22/93	8/16/93
pH - on site	2.727			
pH	4.20	6.39	6.73	6.2
Conductivity	207	91.3	133	83.2
Total Dissolved Solids	130	60	100	55
Total Suspended Solids	42	<1	3	11
Hardness	70.1	37.7	47.4	34.6
Alkalinity	<1.0	4.9	11.1	3.9
Chloride	0.5	0.8	1.4	<0.5
Sulphate	78.8	33.0	50.5	28.9
Total Metals				
Arsenic	0.0204	0.0009	0.0004	0.0005
Cadmium	0.0019	0.0004	<0.0002	0.0006
Calcium	27.0	14.6	17.6	12.9
Copper	0.034	0.008	0.003	0.004
Iron	6.54	0.534	0.078	0.308
Lead	0.026	0.016	0.008	0.012
Magnesium	1.20	0.558	0.849	0.569
Molybdenum	0.001	<0.001	<0.001	<0.001
Silver	0.0005	<0.0001	<0.0001	<0.0001
Zinc	0.183	0.060	0.062	0.064
Mercury	<0.00001	<0.00001	<0.00001	<0.00001
Dissolved Metals				
Arsenic	0.0009	0.0007	0.0004	0.0002
Cadmium	0.0019	<0.0002	<0.0002	0.0006
Calcium	26.3	14.2	17.6	12.9
Copper	0.031	0.008	0.002	0.002
Iron	1.50	0.448	0.078	0.171
Lead	0.018	0.013	0.004	0.005
Magnesium	1.09	0.558	0.849	0.567
Molybdenum	<0.001	<0.001	<0.001	<0.001
Silver	<0.0001	<0.0001	<0.0001	<0.0001
Zinc	0.179	0.059	0.062	0.061

Mr. Ian Sharpe of B.C. Environment provided chemical information from the Red Mountain evaluation site, which was being explored by Red Oak Mines. Seventeen stations on the site had been sampled over a period of two years. Levels of major ions, metals and general water quality parameters (e.g., suspended solids, hardness, alkalinity) were measured weekly, and later, monthly. Monthly and weekly data for the stations were compared and sampling locations with elevated levels of sulphate and metals were identified. The sulphate and metal levels (in particular Zn, Ni and Cu), at sample locations W3, W6, W11, W12 and W17 on the Red Mountain site, were elevated enough to class these waters as HMWs. Sampling kits were sent to the site in the autumn of 1996, but unfortunately the exploration/evaluation team was occupied closing their camp, and could not collect a sample. However, sampling could be conducted in the spring if the evaluation/exploration base camp is re-established.

Mr. Bruce Downing of Teck Corporation provided information on the Windy Craggy Deposit, another evaluation site in B.C. Several rivers and streams originate or have inputs from the Frobisher and Tats glaciers. Table 4.2-3 presents data provided for this site by Mr. Downing. Levels of sulphate and copper measured at station W13 suggest that Red Creek is a HMW. Levels of copper and zinc are also elevated at several other stations in the area.

Finally, Mr. Derek Riehm of Teck Corporation was contacted regarding a site on Vancouver Island near Port Hardy. The B.C. Ministry of Energy, Mines and Petroleum Resources has been collecting chemical data from this site, which is summarized in Panteleyev *et al.* (1995). Five sampling stations indicate possible HMWs (Table 4.2-4), based on the elevated levels of sulphate ($> 100 \text{ mg L}^{-1}$) reported in Panteleyev *et al.* (1995).

Table 4.2-3 Surface water quality (in mg·L⁻¹, mean summer values) of stations in the Windy Craggy deposit area, Northern B.C., near the border with Alaska (from data provided by Mr. Bruce Downing).

Location	Station	Sulphate	Cu	Zn
Red Creek	W12	71	1.7260	0.0307
Red Creek	W13	280	0.0012	0.0900
Turnback Canyon	W1	17	0.0308	0.0626
Frobisher Creek	W2	48	0.1800	0.2260
branch of Alsek R, not labelled	W3	2	0.0028	<0.0005
Noisy Creek	W4	4	0.0020	0.0037
Alsek R. near Noisy Creek	W16	16	0.0335	0.0653
Tats Creek near source	W11	4	<0.0005	<0.0005
branch of Tats Creek, not labelled	W5	21	0.0336	0.0193
branch of Tats Creek, not labelled	W18	11	0.0725	0.0560
Tats Creek, above Tats Lake	W6	19	0.0656	0.0510
discharge from Tats Lake	W7	6	0.0003	<0.0005
Tats Creek junction with Tatshenshini R.	W8	13	0.0350	0.0416
Tatshenshini R. between Tats Cr.& Alsek R.	W15	26	0.0610	0.1213
Tatshenshini R. between Tats & Henshi Creeks.	W9	39	0.0330	0.0800
Tatshenshini R. between Henshi Cr & O'Connor R.	W17	27	0.0598	0.1058
Shini Creek	W20	28	<0.0005	<0.0005
Shini Creek	W19	29	<0.0005	<0.0005

Discussion ensued on the selection of a sampling site for toxicity testing. This would not have been difficult if the only criteria used were elevated levels of sulphate and metals. However, if the presence of aquatic life was also considered, the extremely acidic HMW samples shown in Table 4.2-4 would not be sampled directly. It was suggested that samples be collected in the receiving environments of the HMW(s), yet near the location where the HMW(s) enter the stream/river, using the B.C. Environment data from the summer as a guide to select the sites. Mr. Riehm pointed out that the water quality measured in the summer months would most likely differ from that during the winter. Thus, a potential difficulty was using water quality data from the summer to identify sampling sites in the winter. Another difficulty involved fish habitat. The HMWs are diluted in streams which are habitat for fish. However, it would be necessary to identify locations in the receiving environment near the source of the HMWs. This would require an indicator of HMW that could be easily used in the field, such as conductivity.

Madame Lise Trudel of CANMET suggested that it would be preferable to have some knowledge of the sulphate concentration before taking samples to ensure that the sampling effort required for the toxicity tests would not be wasted (i.e. if sulphate levels were too low). The Port Hardy sites were not sampled in 1996 due to the difficulties of sampling isolated stations under winter conditions. CANMET decided that it would be preferable to wait until spring to continue the project.

Table 4.2-4 Water chemistry of possible HMW sites in the Mount McIntosh/Pemberton Hills area, Northern Vancouver Island (taken from Panteleyev *et al.*, 1995). Concentrations of sulphate and metals are in mg·L⁻¹.

Location	pH	Sulphate	Cu	Pb	Zn
Youghpan Creek, head	3.6	138	0.02	0.06	0.06
Youghpan Creek	3.3	125	0.02	0.06	0.04
H1000 Rd S. McIntosh	3.7	100	0.01	0.31	0.03
Clarklagh Cr. at CL130	3.8	110	0.02	0.21	0.03
South McIntosh	3.8	148	0.01	0.03	0.03

In conclusion, Table 4.2-5 summarizes the sites recommended for future HMW samples.

Table 4.2-5 Location of sites recommended for future HMW samples.

Location	Site
W13 Red Creek	Windy Craggy Deposit
W3 W6 W11 W12 W17	Red Mountain
Little Camp Creek Inflow	Bruceside Project, Sulphurets Property
Youghpan Creek H1000 Rd, S. McIntosh Clarklagh Creek at CL130	Mount McIntosh/Pemberton Hills

4.3 CONSIDERATIONS IN SELECTING HMWs

The sole HMW sample tested in this study contained elevated levels of nickel and copper, relatively low levels of sulphate, and was of moderate acidity (pH 5.5). It is evident from the data in Table 4.2-4 that Port Hardy HMWs are considerably more acid, with pH ranging down to pH 3.3. There are indications from other exploration crews that similarly naturally acidic HMWs are prevalent at other sites.

The hypothesis tested in this study is “natural waters in mineralized areas which have been mined, or are likely to be mined, have no potential for chronic toxicity.” As stated in the Request for Proposal, testing of this hypothesis is necessary to:

1. provide background data against which to assess toxicity testing for operating mines in the case where pre-mining conditions could neither be determined or simulated; and
2. assess the utility of the tests for determining any impacts of mining. An impact of mining is defined as an impact which causes a significant (“real”) environmental problem as compared to pre-mining conditions.

One concern regarding HMWs is that natural populations are naturally acclimated to the locally highly mineralized waters, while test organisms would find them toxic. While local organisms may not be affected by a mining effluent, the non-acclimated test organisms would be overly sensitive to the exposure. Thus, the toxicity test result would not be indicative of actual effects in the field. However, for this to be true, the HMW should not cause toxicity to the local aquatic life either.

Toxicity tests using the local receiving water as the dilution/control water should be more indicative of effects in the field. A second control of laboratory dilution water ensures that toxic or inhibitory responses in the HMW used as control/dilution water, can be quantified. If the HMW water does cause toxicity in the laboratory, the organisms can be acclimated prior to performing tests. The success of the acclimation can also be quantified by comparison to the performance of organisms in

the laboratory dilution water.

The ranges of the fathead minnow (*Pimephales promelas*), the rainbow trout (*Oncorhynchus mykiss*), the duckweed (*Lemna minor*), the cladoceran (*Ceriodaphnia dubia*) and the freshwater algae (*Selenastrum capricornutum*) either cover all of Canada or a large portion of it (Scott and Crossman 1979; Environment Canada 1992a, 1992b, 1992c; APHA, 1995). The extent of this range indicates that these organisms can successfully acclimate to many different conditions, and in general, it suggests they should be able to acclimate to most HMWs which are not toxic to local biota.

Therefore, it should not be necessary to test HMWs of extreme pH (pH<4.0) to determine their toxicity. These samples are certainly toxic - few of the test organisms used in sublethal toxicity tests would survive such exposures, especially if the low pH was accompanied by elevated concentrations of metals. It is highly likely that these conditions are also too severe for successful acclimation of *Ceriodaphnia* and fathead minnow. Yet this does not imply that the test organisms are necessarily more sensitive than natural populations, since these HMWs would almost certainly be toxic to them as well.

HMWs have been shown to cause toxicity to natural populations in the field. For example, water from the Red Dog Creek in Northern Alaska was acutely toxic to native fish such as chum salmon (*Oncorhynchus keta*) eggs, juvenile and adult arctic char (*Salvelinus alpinus*) and Arctic grayling (*Thymallus arcticus*), both in the field and in the laboratory (EVS Consultants, 1995). Fish (species not identified) had been observed in Discovery Pond during the summer, and the outflow was toxic to laboratory organisms (rainbow trout and *Daphnia magna*) in the winter. However, fish had not been seen for some time prior to the collection of samples for sublethal toxicity tests (Mr. Bruce Bennett, JWEL, personal communication).

A second concern is the use of a highly mineralized receiving water as dilution/control water in toxicity tests if the HMW is known to be toxic. If the HMW control causes toxicity, the test becomes invalid. If the effluent also causes toxicity, the test is still invalid. The only occasion where an invalid test can provide useful results is when the effluent itself does not cause significant toxicity when

compared to the laboratory dilution water control. There is no contradiction between field and laboratory results if a HMW causes toxicity to both field and test organisms.

A third concern is identifying the impact of HMWs on a receiving water, which is or may eventually become the receiving water for a mining effluent. Few of the HMWs identified in this study are known to support aquatic life directly. However, these HMWs generally flow into a larger body of water which is known to contain fish and other organisms. A method of identifying the input of HMWs in a stream or river is needed (such as conductivity) which can be simply used in the field.

A fourth concern is variation in the water quality of HMWs. As shown in Table 4.2-2, the water quality of the Little Camp Creek Inflow and the Outflows varied. The apparent water quality of Discovery Pond appeared to change seasonally and may have had repercussions on the fish in the pond (Mr. Bruce Bennett, personal communication). It may be preferable to test several kinds of waters, identifying the scale of problem and possible variation and identifying typical background conditions for different types of mines. This would require testing a large number of samples so as to have a representative sample size. It may not be feasible or economical to perform acclimation studies with the organisms, but a large database on several receiving waters would be gathered.

5.0 REFERENCES

- American Public Health Association [APHA]. 1995. Standard Methods for the Examination of Water and Waste Water. 19th Edition. Eaton, A.D., L.S. Clesceri, and A.E. Greenberg (eds.), Water Environment Federation, Washington, DC., pp. 8-40 to 8-43.
- British Columbia Ministry of Environment, Lands and Parks. 1995. Approved and Working Criteria for Water Quality - 1995. Water Quality Branch, Environmental Protection Department.
- Canadian Council of the Ministers of Environment (CCME). 1996. Canadian water quality guidelines. Chapter 3. Guidelines for the protection of freshwater aquatic life.
- Environment Canada. 1992a. Biological test method: growth inhibition test using the freshwater alga *Selenastrum capricornutum*. Environment Canada EPS 1/RM/25.
- Environment Canada. 1992b. Biological test method: test of reproduction and survival using the cladoceran *Ceriodaphnia dubia*. Environment Canada EPS 1/RM/21.
- Environment Canada. 1992c. Biological test method: test of larval growth and survival using fathead minnows. Environment Canada EPS 1/RM/22.
- Environment Canada. 1996. Draft. Biological test method: early life stage toxicity tests using salmonid fish (rainbow trout, coho salmon, or Atlantic salmon). Environment Canada.
- EVS Environment Consultants. 1995. Review of Wet Test Data and NPDES Permit Recommendations. Draft Report. Prepared for Cominco Alaska, Red Dog Operations.
- Gulley, D. D., A. M. Boelter, and H. L. Bergman. 1989. Toxstat Release 3.2. University of Wyoming, Laramie, WY.
- Jacques Whitford Environment Ltd. 1996. Report on Discovery Hill Pond. Draft Report. Prepared for Voisey's Bay Nickel Co. Ltd.
- Panteleyev, A., S. J. Sibbick and V. M. Koyanagi. 1995. Natural acidic drainage in Northern Vancouver Island - its place in geoenvironmental ore deposit models. Geol. Fieldwork, pp. 61-65

Saskatchewan Research Council. 1996. Draft Protocol for the *Lemna minor* Growth Inhibition Test. A modification of the 8211 *Duckweed (Proposed)* toxicity test procedure published by American Public Health Association [APHA] (1995).

Scott, W.B. and E. J. Crossman. 1979. Freshwater fishes of Canada. Bull. Fish. Res. Board Can. 184. 966 p.

APPENDIX 1

Test Methods

Table A 1-1. Growth Inhibition Test Using the Freshwater Alga *Selenastrum capricornutum* (EPS 1/RM/25).

1.	Test type:	Static non-renewal
2.	Test duration:	72 hours
3.	Temperature:	25 ± 1°C
4.	Light intensity:	400 ± 30 lux
5.	Photoperiod:	Continuous light
6.	Nutrient addition:	Enriched culture medium (13.75 X AAM)
7.	Test chamber:	96 well Microplate
8.	Test solution volume:	250 µL per well
9.	Culture condition:	logarithmically growing
10.	No. of rep./conc'n:	7
11.	Initial cell concentration:	10,000 cell/ml
12.	Dilution water:	Sterile, filtered reagent water, receiving water
13.	Final cell concentration in control:	880,000 cell/ml (CV = 17%)
14.	Measured end points:	IC _p , NOEC, LOEC (growth inhibition)

Table A 1-2. Summary of the test conditions: The *Lemna minor* Growth Inhibition Test. A modification of the 8211 Duckweed (*Proposed*) toxicity test procedure published by American Public Health Association [APHA] (1995). (SRC draft protocol 1996).

1. Test type:	Static
2. Temperature:	25 ± 2 °C
3. Test duration:	7 d
4. Dilution water:	Receiving water or Test media
5. Test chamber:	25 mL polystyrene
6. Test solution volume:	25 mL
7. Initial no. of plants per replicate:	3 plants, each with 3 - 4 fronds
8. No. of replicates/concentration:	8
9. Culture age (d):	7
10. Light intensity:	63 - 72 μE/m ² /s
11. Photoperiod	Continuous
12. Culture origin:	UTCC
13. Observations:	Increase in biomass (no. of fronds)
14. End-points:	Growth inhibition (IC _p , NOEC, LOEC)
15. Test validity:	≥ 10 fold increase in the number of fronds in the test media control by 7 d; < 10% diseased, stressed or dead control plants.

Table A 1-3. Test of Reproduction and Survival Using the Cladoceran *Ceriodaphnia dubia* (EPS 1/RM/21).

1. Test type:	Static renewal
2. Temperature:	25 ± 1 °C
3. Test duration:	7 ± 1 day
4. Dilution water:	Laboratory well water, receiving water
5. Test chamber:	Plastic vials (24 X 55 mm)
6. Test solution volume:	15 mL
7. Renewal of test solutions:	24 h intervals
8. Organisms:	Neonate (<24 h old) <i>Ceriodaphnia dubia</i>
9. No. animals/test chamber:	1
10. No. test chambers/concentration:	10
11. No. animals/concentration:	10
12. Feeding:	2 drops YCT mixture/test chamber daily
13. Lighting:	Cool white fluorescent 40 to 50 ft candles
14. Photoperiod:	16 h light, 8 h dark
15. Aeration:	None. DO 40-100% saturation throughout test.
16. Observations:	Daily: first-generation mortality, numbers of live neonates produced/adult
17. End-points:	ICp, NOEC/ LOEC(reproduction), LC50 if appropriate
18. Test validity:	Control mortality ≤20%, a mean of ≥15 young produced per female in controls.

Table A 1-4. Summary of test conditions: Test of Larval Growth and Survival Using Fathead Minnows (EPS 1/RM/22).

1. Test type:	Static renewal
2. Temperature:	25 ± 1 °C
3. Test duration:	7 d
4. Control/dilution water:	Laboratory well water or receiving water
5. Test chamber:	Disposable polystyrene beakers (1.0 L)
6. Test solution volume:	250 mL
7. Renewal of test solutions:	24 h intervals
8. Organisms:	Larvae (<24 h post hatch)
9. No. animals/test chamber:	10
10. No. test chambers/concentration:	4
11. No. animals/concentration:	40
12. Feeding:	3 x daily with brine shrimp nauplii, no feeding during final 12 h of testing.
13. Lighting:	Cool white fluorescent 40 to 50 ft candles
14. Photoperiod:	16 h light, 8 h dark
15. Aeration:	None. DO 40-100% saturation throughout test.
16. Observations:	Mortality/ swimming behaviour daily, mean dry weight at end of test
17. End-points:	NOEC/LOEC, ICp for survival and growth.
18. Test validity:	Control mortality ≤20%, average weight of control fish at end of test at least 250 µg.

Table A 1-5. Summary of test conditions: Toxicity Tests Using Early Life Stages of Salmonid Fish (E-test: embryo rainbow trout *Oncorhynchus mykiss*).

1.	Test type:	Static renewal
2.	Start of Test:	within 30 m of fertilization
3.	Test duration:	7 days
4.	Control/dilution water	Laboratory well water or receiving water
5.	Temperature:	15 \pm 1°C
6.	Lighting:	dark
7.	Aeration:	yes
8.	Observations:	egg viability, deformities
9.	Measurements:	Temperature , conductivity in all solutions; DO, pH in representative concentrations.
10.	Feeding regime:	None
11.	Volume of test chamber	2.5 L
12.	Source of organisms:	Certified fish hatchery
13.	No. eggs per test chamber:	40
14.	No. of test chambers/conc'n:	3
15.	Measured end points:	EC50, NOEC, LOEC, TEC for viability.
16.	Test validity:	\geq 70% viability in controls at end of test, DO \geq 60% in all test solutions, temperature difference between replicates <2 °C.

APPENDIX 2

Criteria for the Selection of Highly Mineralized Waters.

Criteria for the Selection of Highly Mineralized Waters.

Highly Mineralized Waters (HMW) are receiving waters with elevated concentrations of metals and sulphates. A HMW sample will be selected if the concentrations of metals and sulphates surpass the approved/working criteria for the protection of aquatic life set by the Water Quality Branch, Environmental Protection Department of the British Columbia Ministry of Environment, Lands and Parks.

It should be noted that a receiving water sample should be "collected upstream from the source of contamination, or adjacent to the source but removed from it" (Environment Canada, 1992).

1. The sulphate concentration of the receiving water should be greater than the B.C. criteria for the protection of aquatic life ($> 100 \text{ mg}\cdot\text{L}^{-1}$).
2. The concentration of one of the following metals: Cd, Cu, Cr, Pb, Ni, Zn should be greater than the B.C. criteria for the protection of aquatic life. The criteria can vary according to the hardness of the receiving water. The table below can be used as a guide.

Metal	Water Hardness ($\text{mg}\cdot\text{L}^{-1} \text{CaCO}_3$)			
	0 - 60	60 - 120	120 - 180	> 180
Cd	0.2	0.8	1.3	1.8
Cu*	*	*	*	*
Pb*	*	*	*	*
Ni	25	65	110	150
Zn	30	30	30	30

* calculate the limit using the water hardness (as $\text{mg}\cdot\text{L}^{-1} \text{CaCO}_3$) and following formulas:

Cu ($\mu\text{g}\cdot\text{L}^{-1}$): $0.04 \cdot (\text{average hardness})$.

Pb ($\mu\text{g}\cdot\text{L}^{-1}$): $3.31 + \exp[1.273 \cdot \ln(\text{average hardness}) - 4.705]$.

APPENDIX 3

Instructions For Collecting and Shipping Highly Mineralized Water Samples

1.0 PROCEDURES FOR COLLECTING AND SHIPPING SAMPLES OF HIGHLY MINERALIZED DILUTION WATER FOR TOXICITY TESTING AND CHEMICAL ANALYSES

Toxicity testing and chemical analyses will be performed on samples of highly mineralized receiving waters.

A receiving water sample should be "collected upstream from the source of contamination, or adjacent to the source but removed from it" (Environment Canada, 1992).

You will be provided with equipment (containers, coolers, ice packs, preservatives, address labels, etc.) for shipping the sample. The highly mineralized receiving water will be collected in the shipping containers provided. All materials that come into contact with the sample must be clean, non-toxic and inert. Sample transfer must be accompanied by continuous mixing using manual stirring or other appropriate means.

There must be no chemical preservatives added to any of the samples for toxicity testing.

The sample may be shipped by ground or air. The samples must not freeze during transport and should be clearly labelled. Unlabelled samples will not be tested.

2.0 PROCEDURE FOR COLLECTING AND SHIPPING HIGHLY MINERALIZED WATER FOR TOXICITY TESTING.

PREPARATION: Ice packs should be frozen prior to sampling. A clean 1 gallon plastic container will be needed to bring a sub-sample back to your own laboratory for filtering. All materials that come into contact with the sample must be clean, non-toxic and inert.

1. Fill out a **CHAIN OF CUSTODY SHEET** and include with each shipment. Identify the sample, the company name and location, the type of sample (grab, composite), the date and time of sampling and the name of the person who collected the sample.
2. Insert plastic liners inside **twenty-one (21) 20 L white plastic pails**. Rinse the pails three (3) times, fill entirely (no acid, no airspace), affix labels, and send to

**B.A.R. Environmental Inc.
11 Nicholas Beaver Park, R.R. 3
Guelph, Ontario
N1H 6H9**

3. When sampling is completed, fax the transporter's name and the waybill number to:

**Robert Roy
B.A.R. Environmental Inc.
(519) 763-4419.**

3.0 SAMPLING, PRESERVATION AND SHIPPING FOR CHEMICAL ANALYSES

1. Rinse the 1-gallon sample container 3 times with the HIGHLY MINERALIZED WATER sample before filling. Transport to an on-site facility for filtration (bottle type M (D), see table below.

2. Fill the sample bottles to the base of the bottle neck. Add preservative if necessary, according to the table below:

BOTTLE TYPE	PRESERVATIVE	CODE DOT	SPECIAL INSTRUCTIONS
M (T) 250 mL	5 mL 50% HNO ₃	Blue	NIL(plastic bottle)
M (D) 250 mL	5 mL 50% HNO ₃	Blue	Filter with 0.45 µm filter before adding acid (plastic bottle)
R 1 L	4 °C	NIL	NIL(plastic bottle)
G2 500 mL	5 mL 50% H ₂ SO ₄	Black	NIL(plastic bottle)
CN 500 mL	2 mL 6N NaOH	Red	NIL (plastic bottle)

3. Seal and label the bottles, place in cooler with frozen ice-packs and send by courier (air or land express) to:

**Seprotech Laboratories
2378 Holly Lane
Ottawa, Ontario
K1V 7P1**

Please ensure that samples do not freeze prior to shipment, and are kept cool (between 1 and 8°C, preferably between 2 and 6 °C).

APPENDIX 4

Test Reports

Growth Inhibition Test with *Selenastrum capricornutum*

Growth Inhibition Test with *Lemna minor*

Survival and Reproduction of *Ceriodaphnia dubia*

Growth and Survival of Larval Fathead Minnow

Viability of Rainbow Trout Embryos - E-test.



Certificat d'analyse • Certificate of Analysis

Rob Roy
B.A.R. Environmental Inc.
Nicholas Beaver Park, R.R. 3
Guelph, Ontario
Canada N1H 6H9

March 25, 1997
Project No: 10424-55234

Project reference: HMW Study
P.O.: T597

SAMPLE IDENTIFICATION (type, date, time)	TEST NUMBER	DATE RECEIVED	DATE OF ANALYSIS	TOXICITY CONTROL - 72 hrs Inhibition at 100% v/v <i>S. capricornutum</i> (Algae)
---	-------------	---------------	------------------	---

BAR #1752, 26/11/96, 12:45 HMV Voisey	15851	27/11/96	27-30/11/96	97.1%
--	-------	----------	-------------	-------

SUMMARY OF RESULTS:

Sample

BAR #1752, 26/11/96, 12:45

Conclusions

Effect

	<u>Cells/mL</u>
Average count of sample:	27992
Average count of control:	969418
Average count of supplementary control:	1221793


T-Test between sample and control:

T-Test between control and supplementary control:

Significant difference

Significant difference

Statistical Method: T-tests
N/A : not applicable


Bernard Visser, B.Sc.
Biologist
Ecotoxicology Department



Certificat d'analyse • Certificate of Analysis

TEST CONDITIONS

Sample description:	BAR #1752, 26/11/96, 12:45
Sampling point:	HMW Voisey
Name of sampler:	D. Kieboom
Date of analysis:	27-30/11/96
Our project-sample number:	10424-55234
Bioassay test number:	15851
Technician:	Elliott Picken
Organism:	<i>Selenastrum capricornutum</i>
Culture age:	4 to 7 days
Innoculation:	~10000cells/mL
Medium:	13.75X (mL, each of 5 mother solutions)
Dilution water:	deionized water (sterilized)
Sample preparation:	filtered @ 0,45µm
Bioassay protocol:	EPS 1/RM/25, November 1992

Sample concentration (%v/v)	average corrected count of algae after 72 hours (cells/mL)	inhibition (%) *	pH (adjusted)	temperature (°C)		coefficient of variation (%)
				start	end	
100 (5 readings)	24458	97.5	6.5	23	24	4.8
100 (5 readings)	17064	98.2	6.5	23	24	13.1
100 (5 readings)	15844	98.4	6.5	23	24	6.6
100 (5 readings)	43075	95.6	6.5	23	24	3.6
100 (5 readings)	21491	97.8	6.5	23	24	11.3
100 (5 readings)	46091	95.2	6.5	23	24	5.9
100 (5 readings)	40395	95.8	6.5	23	24	4.1
100 (5 readings)	26851	97.2	6.5	23	24	6.9
100 (5 readings)	16657	98.3	6.5	23	24	11.4
Average inhibition:		97.1				
Control #1 (5 rdgs.)	797666	n.a.	6.5	23	24	1.4
Control #2 (5 rdgs.)	978572	n.a.	6.5	23	24	1.7
Control #3 (5 rdgs.)	990297	n.a.	6.5	23	24	1.6
Control #4 (5 rdgs.)	944688	n.a.	6.5	23	24	1.7
Control #5 (5 rdgs.)	842988	n.a.	6.5	23	24	14.5
Control #6 (5 rdgs.)	1064933	n.a.	6.5	23	24	0.7
Control #7 (5 rdgs.)	1113247	n.a.	6.5	23	24	2.0
Control #8 (5 rdgs.)	986995	n.a.	6.5	23	24	1.2
Control #9 (5 rdgs.)	1005373	n.a.	6.5	23	24	1.3

REMARKS: Reference Toxicity Assay: Cl₂₅ = 339.4 (337.3 - 341.5) mg/L(NaCl)
 Historical warning limits: Min / Max = 219.8 / 446.2
 * Inhibition calculated per well over average of control counts.

Ce certificat ne doit pas être reproduit, sinon en entier, sans l'autorisation écrite du laboratoire. Les échantillons mentionnés plus haut seront conservés pendant 30 jours à partir de la date du rapport à moins d'instructions écrites du client.

This certificate may not be reproduced except in its entirety, without the written approval of the laboratory. Samples pertaining to this report will be kept for 30 days after the date of the report unless otherwise instructed, in writing, by the client.



Certificat d'analyse • Certificate of Analysis

BAR #1752 HMW 26/11/96

File: 10424-A1 Transform: NO TRANSFORM

t-test of Solvent and Blank Controls

Ho:GRP1 MEAN = GRP2 MEAN

GRP1 (SOLVENT CRTL) MEAN = 969417.6667	CALCULATED t VALUE = 28.3875
GRP2 (BLANK CRTL) MEAN = 27991.7778	DEGREES OF FREEDOM = 16
DIFFERENCE IN MEANS = 941425.8889	

TABLE t VALUE (0.05 (2),16) = 2.120** SIGNIFICANT DIFFERENCE at alpha=0.05
TABLE t VALUE (0.01 (2),16) = 2.921** SIGNIFICANT DIFFERENCE at alpha=0.01

GRP 1: Control of microplate 1

GRP 2: Sample (at 100% v/v) of microplate 1

BAR HMW 2 CONTROLS

File: 10424-A2 Transform: NO TRANSFORM

t-test of Solvent and Blank Controls

Ho:GRP1 MEAN = GRP2 MEAN

GRP1 (SOLVENT CRTL) MEAN = 1221793.3333	CALCULATED t VALUE = 6.9462
GRP2 (BLANK CRTL) MEAN = 969417.6667	DEGREES OF FREEDOM = 16
DIFFERENCE IN MEANS = 252375.6667	

TABLE t VALUE (0.05 (2),16) = 2.120** SIGNIFICANT DIFFERENCE at alpha=0.05
TABLE t VALUE (0.01 (2),16) = 2.921** SIGNIFICANT DIFFERENCE at alpha=0.01

GRP 1: Control of microplate 2

GRP 2: Control of microplate 1

SUB-CHRONIC TEST REPORT

Lemna minor Growth Inhibition

1 of 3

B.A.R. ENVIRONMENTAL INC.



Sample Number : 03961752

Sample Identification

Company	: CANMET	Date Collected	: 11/05/96
Location	: Voisey Bay, Labrador	Received	: 11/07/96
Substance	: HMW	Tested	: 11/27/96
Sample Method	: Siphoned	Shipped By	: courier
Collected By	: P. Pretty/C. Holett	Lab Storage	: 6°C

Test Protocol : Saskatchewan Research Council (SRC). 1996. "Draft" The *Lemna minor* Growth Inhibition Test. A modification of the 8211 Duckweed (Proposed) Toxicity Test Procedure published by American Public Health Association (APHA) 1995. Standard Methods for the Examination of Water and Waste Water, 19th Edition. Eaton A.D., L.S. Clesceri, and A.E. Greenberg (eds.), Water Environment Federation, Washington, D.C., pp.8-40 to 8-43.

Results

There was significant growth inhibition at 97.0% effluent concentration as determined by a t-test ($p = 0.05$).

Comments

Date:

April 9, 1997

Approved by:

Jim Reid, Laboratory Supervisor

Sample Number: 03961752

Initial Parameters

Temp. on arrival (°C) : not taken
 Temperature (°C) : 24.0 Dissolved Oxygen(mg/L): 10.8 pH : 5.5 Conductivity (umhos/cm) : 79

Test Conditions

Test Species	: <i>Lemna minor</i>	Temperature	: 25 ± 2° C
Test Type	: Static	Photoperiod (h) light/dark	: Continuous Light
Test Duration	: 7 days	Light Intensity	: 63 - 72 µE/m ² /s
Number of Replicates	: 8	Control Water	: SRC Test Media
# Fronds/Replicate	: 3	Growth Medium	: APHA modified (SRC 1996) from APHA 1992)
Test Volume (mL) by Rep	: 50		
Axenic Cultures	: yes	Acclimation	: Plants in Hoaglands E ⁺ medium; acclimated 24h in test medium.

Reference Toxicant Data

Substance : Potassium Dichromate

Date Tested: 04/25/96

Growth

IC25	: 1.11 mg/L	Method	: Linear	Historical Mean IC25	: 1.47 mg/L
95% CL	: 0.65 - 1.70		: Interpolation	Warning Limits (±2SD)	: 0.52 - 2.42

Definitions

IC_p : inhibiting concentration for a specified percentage effect

Sample Number: 03961752

Growth Data									
Effluent Concentration (%)	Total number of fronds								Mean number of fronds
	Replicate								
	1	2	3	4	5	6	7	8	
Synthetic Test Media Control	29	27	42	34	47	36	38	41	36.750
Positive Control	18	18	25	20	20	16	21	15	19.125
97.0	5	7	8	7	8	7	5	8	6.875

SUB-CHRONIC TEST REPORT

Ceriodaphnia dubia Survival and Reproduction

1 of 3

B.A.R. ENVIRONMENTAL INC.



Sample Number : 03961752

Sample Identification

Company	: CANMET	Date Collected	: 11/05/97
Location	: Voisey Bay, Labrador	Received	: 11/07/97
Substance	: HMW	Tested	: 11/27/96
Sample Method	: Siphon	Shipped By	: courier
Collected By	: P. Pretty/C. Holeit	Lab Storage	: 6°C

Test Protocol : Biological Test Method: Test of Reproduction and Survival using the Cladoceran *Ceriodaphnia dubia*. Environment Canada, Conservation and Protection. Ottawa, Ontario. Report EPS 1/RM/21, 72p.

Results

100% mortality at 100% effluent concentration after 24 hours exposure.

Comments

Date: April 9, 1997

Approved by: _____


Jim Reid, Laboratory Supervisor

Sample Number: 03961752

Initial Parameters

Temp. on arrival (°C) : not taken

Temperature (°C) : 24.0 Dissolved Oxygen(mg/L): 10.8 pH : 5.5 Conductivity (umhos/cm) : 79

Test Conditions

Batch Number : Cd96-11

Test Organism : *Ceriodaphnia dubia*

Test Volume (mL) by rep. : 15

Life Stage : neonate (<24 h old)

Temperature : 25 ± 1°C

Test Type : Static Renewal

Photoperiod (h) light/dark : 16/8

Test Duration : 7 ± 1 day (three brood)

Control Water : Undiluted well water

Number of Replicates : 10

Feeding : once/day; *Selenastrum* + YCT

Organisms/Replicate : 1

Renewal of Test : 24h intervals

Reference Toxicant Data

Substance : Sodium Chloride

Date Tested: 11/22/96

Batch Number : Cd96-11

Reproduction

IC25 : 1.17 g/L

Method : Linear

Historical Mean IC25 : 1.26 g/L

95% CL : 0.84 - 1.41

Interpolation

Warning Limits (±2SD) : 0.59 - 1.94

Definitions

NOEC : No-observed-effect concentration

LOEC : Low-observed-effect concentration

IC_p : inhibiting concentration for a specified percentage effect

LC50 : median lethal concentration

TEC : threshold-effect concentration

Sample Number: 03961752

Reproductive Data												
Effluent Concentration (%)	Total number of young per female										Adult Survival	Mean number of young per adult
	Replicate											
	1	2	3	4	5	6	7	8	9	10		
Control	36	32	31	27	31	28	25	29	32	29	1.0	30.000
100	0*	0*	0*	0*	0*	0*	0*	0*	0*	0*	0	0


* - adult mortality

SUB-CHRONIC TEST REPORT

Larval Fathead Minnow Survival and Growth

1 of 3

B.A.R. ENVIRONMENTAL INC.



Sample Number : 03961752

Sample Identification

Company	: CANMET	Date Collected	: 11/05/96
Location	: Voisey Bay, Labrador	Received	: 11/07/96
Substance	: HMW	Tested	: 11/26/96
Sample Method	: Siphoned	Shipped By	: courier
Collected By	: P. Pretty/C. Holett	Lab Storage	: 6°C

Test Protocol : Biological Test Method: Test of Larval Growth and Survival Using Fathead Minnows. Environment Canada, Conservation and Protection. Ottawa, Ontario. Report EPS 1/RM/22, 70p.


Results

100% mortality at 100% effluent concentration after 24 hours exposure.

Comments

Date: April 9, 1997

Approved by: _____

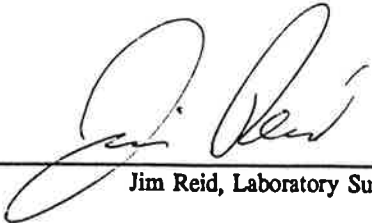
Jim Reid, Laboratory Supervisor

Sample Number: 03961752

Initial Parameters

Temp. on arrival (°C) : not taken

Temperature (°C) : 24.0 Dissolved Oxygen(mg/L): 10.8 pH : 5.5 Conductivity (umhos/cm) : 79

Test Conditions

Batch Number	: FHM96-11	Test Volume (mL) by rep.	: 500
Test Organism	: Fathead Minnow	Temperature	: 25 ± 1°C
Life Stage	: Larval (<24h old)	Photoperiod (h) light/dark	: 16/8
Test Type	: Static Renewal	Control Water	: Undiluted well water
Test Duration	: 7 days	Feeding	: 2-3 times/day; 1500-2250 nauplii
Number of Replicates	: 5	Renewal of Test	: 24h intervals
# Organisms/Replicate	: 10		

Reference Toxicant Data

Substance : Potassium Chloride

Date Tested: 11/09/96 Batch Number : FHM96-11

Survival

IC25	: 0.84 g/L	Method	: Linear	Historical Mean IC25	: 0.79 g/L
95% CL	: 0.67 - 1.00		: Interpolation	Warning Limits (±2SD)	: 0.67 - 0.92

Definitions

NOEC	: No-observed-effect concentration
LOEC	: Low-observed-effect concentration
IC _p	: inhibiting concentration for a specified percentage effect
LC50	: median lethal concentration
TEC	: threshold-effect concentration

Sample Number: 03961752

Survival Data

Effluent Concentration (%)	Proportion of Survival in Replicate Chambers					Mean Proportion Surviving
	A	B	C	D	E	
Control	0.9	1.0	0.9	1.0	1	0.960
100	0	0	0	0	0	0.000

Growth Data

Effluent Concentration (%)	Average Dry Weight (mg) in Replicate Chambers					Mean Dry Weight (mg)
	A	B	C	D	E	
Control	0.647	0.604	0.603	0.648	0.657	0.632
100	cm	cm	cm	cm	cm	-


cm = complete mortality

SUB-CHRONIC TEST REPORT

Rainbow trout 7-day embryo test

1 of 3

B.A.R. ENVIRONMENTAL INC.



Sample Number : 03961752

Sample Identification

Company	: CANMET	Date Collected	: 11/05/96
Location	: Voisey Bay, Labrador	Received	: 11/07/96
Substance	: HMW	Tested	: 11/26/96
Sample Method	: Siphon	Shipped By	: courier
Collected By	: P. Pretty/C. Holett	Lab Storage	: 6°C

Test Protocol : Biological Test Method: Toxicity Tests Using Early Life Stages of Salmonid Fish (Rainbow Trout, Coho Salmon, or Atlantic Salmon). Environment Canada, Conservation and Protection. Ottawa, Ontario. Report EPS 1/RM/28, 81p. (2nd edition - draft).

Results

100% mortality at 100% effluent concentration after 7 days exposure.

Comments

Date: April 9, 1997

Approved by: _____


Jim Reid, Laboratory Supervisor

Sample Number: 03961752

Initial Parameters

Temp. on arrival (°C) : not taken

Temperature (°C) : 15.0 Dissolved Oxygen(mg/L): 10.9 pH : 6.0 Conductivity (umhos/cm) : 89

Test Conditions

Test Organism	: Rainbow Trout	Test Volume (mL) by rep.	: 2L
Life Stage	: Embryo	Temperature	: 15 ± 1°C
Test Type	: Static Renewal	Photoperiod	: 24 h darkness
Test Duration	: 7 days	Control Water	: Undiluted well water
Number of Replicates	: 5	Feeding	: n/a
# Organisms/Replicate	: 40	Renewal of Test	: 24h intervals

Reference Toxicant Data

Substance : Copper (as copper sulphate)

Date Tested : 06/04/96

Viability

IC25	: 199.7 ug/L	Method	: Linear Interpolation	Historical Mean IC25	: 344.48 ug/L
95% CL	: 148.5 - 240.4			Warning Limits (±2SD)	: 0 - 757.80

Definitions

NOEC	: No-observed-effect concentration
LOEC	: Low-observed-effect concentration
IC _p	: inhibiting concentration for a specified percentage effect
LC50	: median lethal concentration
TEC	: threshold-effect concentration

Sample Number: 03961752

Viability Data						
Effluent Concentration (%)	Total number of survivors					Mean Proportion Survival
	Replicate					
	1	2	3	4	5	
Control	38	40	32	40	40	0.95
100	0	0	0	0	0	0